
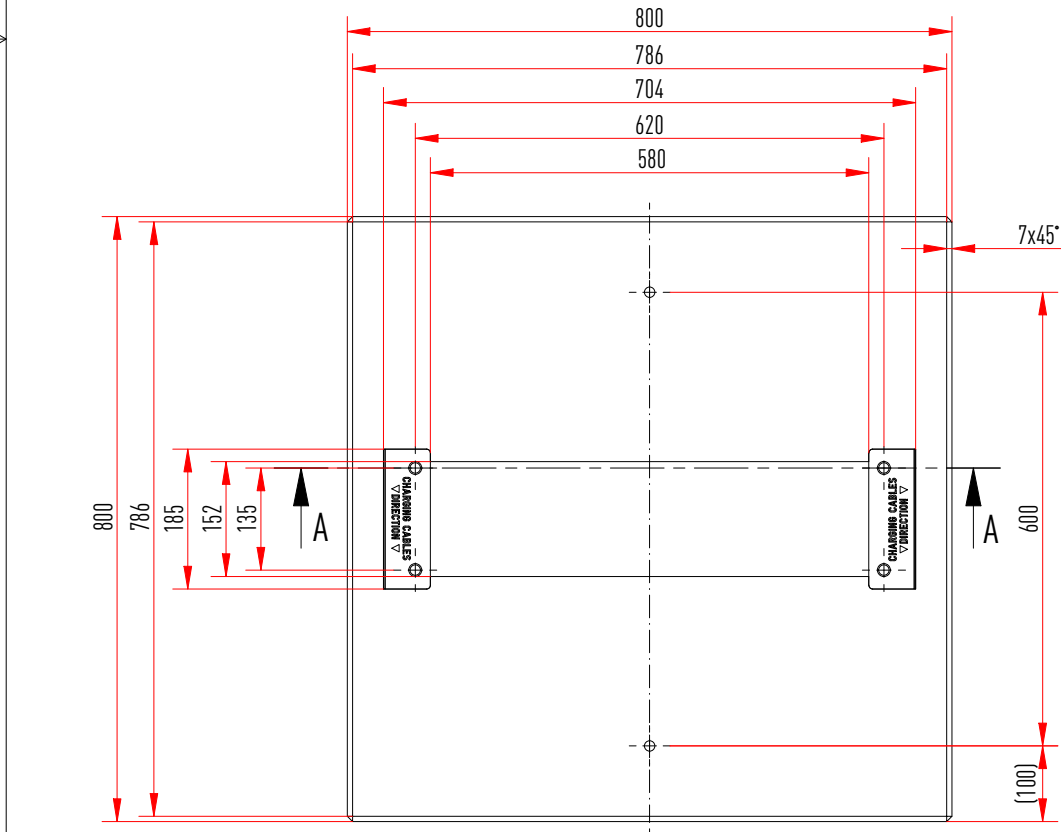
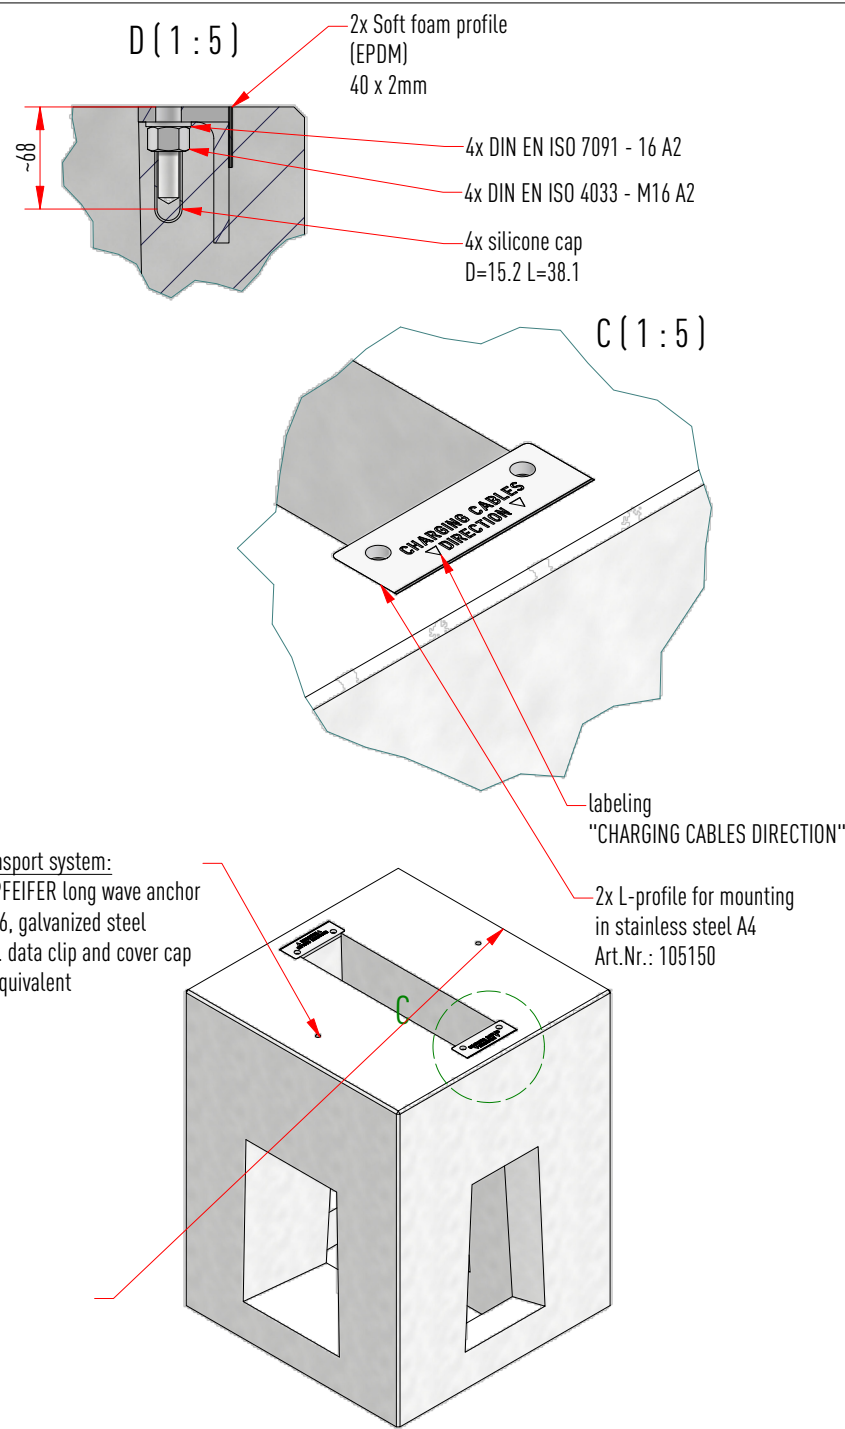
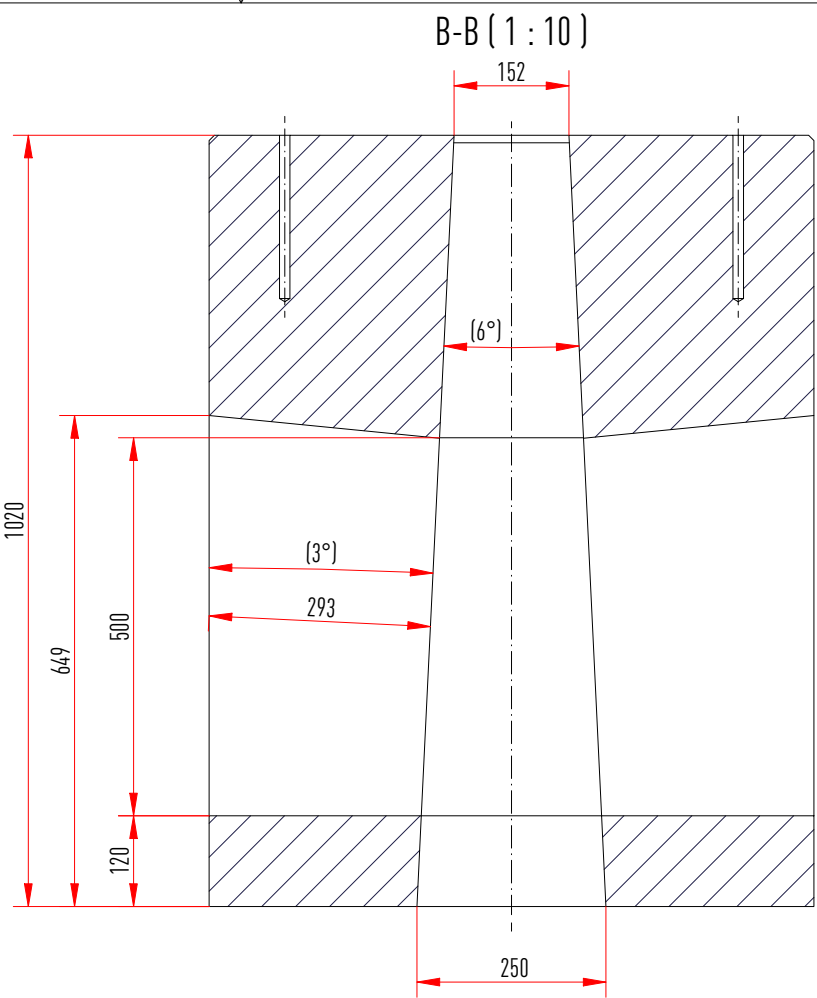


The copyright of this drawing belongs to Kortmann Beton GmbH & Co. KG. Without written permission, this drawing may not be altered, renamed, copied, or made accessible to third parties.

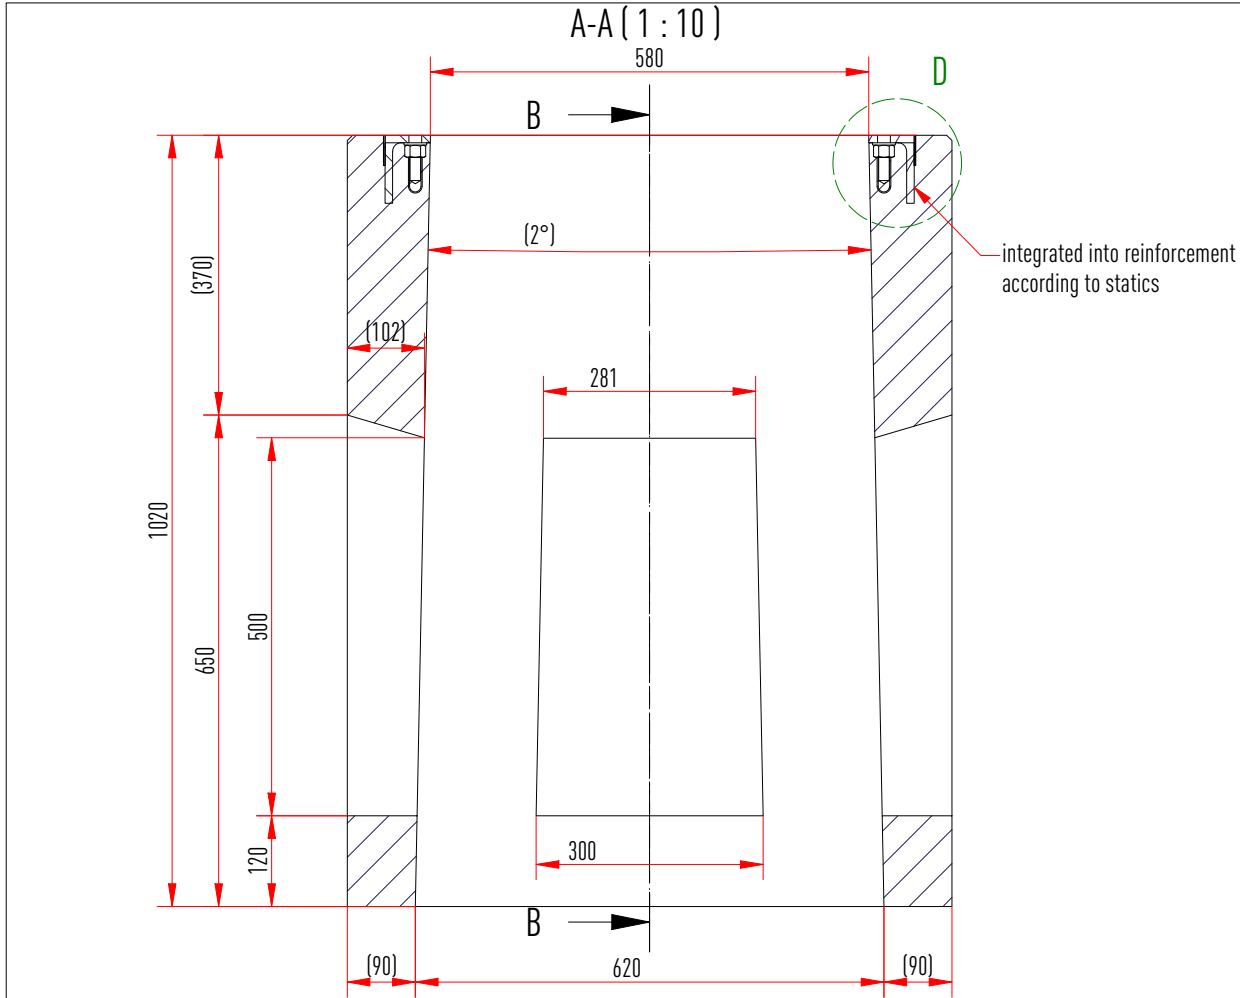

Note: Installation of transport and fastening systems must be in accordance with manufacturer's installation instructions.

Transport anchor:						
Dynamic factor	β	Z (with β max)	Installation	transverse loading	Number of anchors*	SRF
1,3 (Transport)	0-45°	1,4	surface installation	No	2	188 mm ² /m
Tower crane, gantry crane, mobile crane						

* Equalizing sling required for 4 load-bearing anchors

** Design of the fastening system according to customer requirements. Permissible loads for axial or transverse tension according to manufacturer specifications. Technical planning/design must be carried out afterwards by the customer/structural engineer.

Rev05	Additional markings of the labels	29.09.2025	hhermes
Rev05	Label "HCS" to "MCS"	21.08.2025	leersink
Rev03	T-Fix anchor removed / hexagon nut, washer and silicone cap added	08.08.2025	leersink
Rev02	Adapter plate adapted to L-profile steel / geometry of the inside breakout and side breakouts adapted	25.07.2025	leersink
Rev01.1	Draft angle changed from 2° to 6° and direction modified, 4x labeling added and embossing in adapter plate specified	30.05.2025	jrein
Revision	Description of change	Date	Approved by
Revision			
KORTMANN		Weight: 1012 Kg	Concrete: 971 Kg
Kortmann Beton GmbH & Co. KG Holmers Kamp 6 48465 Schüttorf info@kortmann-beton.de www.kortmann-beton.de		Reinforcement: 37 Kg	Adapter: 4 Kg
Document status:		Material:	
Approved		EV Charging Station Foundation Dispenser Truck – HYC 1000 für Alptronic – 800x800x1020 mm	
Non-dimensioned edges ISO 13715		Drawing Number:	
General tolerances according to:		KB-0001572	
- DIN EN ISO 9013-232		1/1	
- ISO 2768-cK			
- DIN EN ISO 13920 B			
Dimensions:			
1020 x 800 x 800 mm			
Article Number:			
105100			
Rev04			